



NPDKB.COM

南普敦國際有限公司

LED透光 薄膜天花



tw.bao-yi.com



Email
baoyi.pro@bao-yi.com



Address
108022 臺北市萬華區
和平西路3段341號

CALL NOW
02 2308 5977

透光薄膜天花

- ▷ 本產品:LED透光薄膜天花
- ▷ 功能:照明、裝飾
- ▷ 產地:德國
- ▷ 防火(防燄)等級分類證明書:
德國標準 DIN 4102 B1等級
- ▷ 尺寸:寬度480公分長度無限 ∞ (可訂製)
- ▷ 樣式:花色圖樣可訂製

南普敦獨家 進口代理取得

Prüfinstitut Hoch
Lerchenweg 1
D-97650 Fladungen
Tel.: 09778-7480-200, Fax: 09778-7480-209
notified body no.: 1508
hoch.fladungen@t-online.de
Mitglied der  **EAL**
www.brandverhalten.de


Hoch
Fladungen

Prüfinstitut für das Brandverhalten von Bauprodukten, Dipl.-Ing. (FH) Andreas Hoch
Bauaufsichtlich anerkannte Prüf-, Überwachungs- und Zertifizierungsstelle

TEST REPORT

PZ-Hoch-121017

for the proof of Fire behaviour according to DIN 4102, part 1

Translation of the German test report – no guarantee for translation of technical terms

company	Junkers & Müllers GmbH Bolksbuscher Straße 27 D – 41239 Mönchengladbach
description of samples	PES-fabric, coated on one side with polymer (white)
name of the material	„TT MEDIATEX ILLUMINANCE UV 140“
sampling	by the company itself
content of request	Proof of flammability to classify building materials to class B1 "schwerentflammbar" according to DIN 4102, part 1
validity of test report	31.08.2017 ^{*)}
result	The examined product meets the requirements of class B1 for "schwerentflammbare" (hardly flammable) building materials according to DIN 4102, part 1 (May 1998) , suspended freely or with distance of >40 mm to same or other plain materials.

This test report includes 4 pages and 4 enclosures.

Remark: If the above mentioned building material is not used as product according to MBO § 2, Abs. 9, Ziffer 1, there is no need for a general building supervisory test report.
This test report is not valid if the examined building material is used as product in the meaning of state building prescriptions (MBO § 17, Abs. 3).
This test report does not replace an eventually necessary proof of applicability concerning building supervisory or building laws in the meaning of state building prescriptions. This has to be verified by:

- "allgemeine bauaufsichtliche Zulassung" (general building inspectorate approval) or by
- „allgemeines bauaufsichtliches Prüfzeugnis“ (general building inspectorate certificate) or by
- "Zustimmung im Einzelfall" (exceptional approval)

This test report can underlie building supervisory procedures

- for regular building products for the prescribed proofs of conformity
- for non regular building products for the needed proofs of applicability.

This test report must not be published and copied without preceding agreement of the test laboratory and if agreed, only during validity and unchanged concerning appearance and contents.


^{*)} prolongation on request.

^{*)} Verlängerung auf Antrag
Prüf-Institut Hoch



NPDKB.COM
南普敦國際有限公司

LED模組

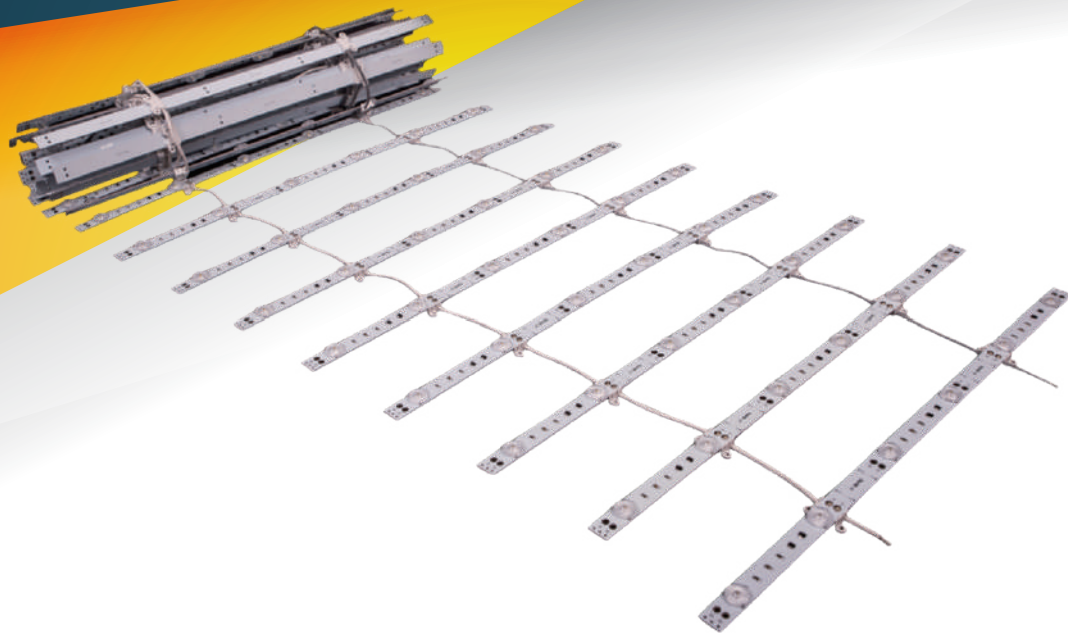


Shooting Star (GEN 3) 產品使用方式

DC
24V

光效
140lm/W

室內燈箱
>40mm


壽命
30000H

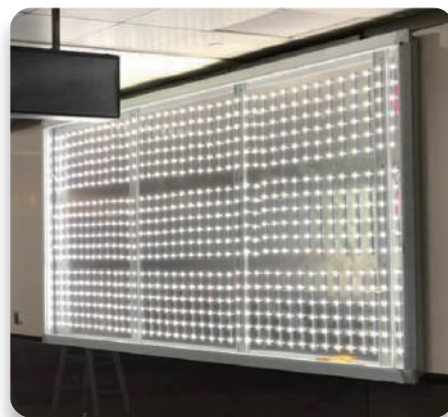

NPDKB.COM
南普敦國際有限公司

LED模組

產品圖面:

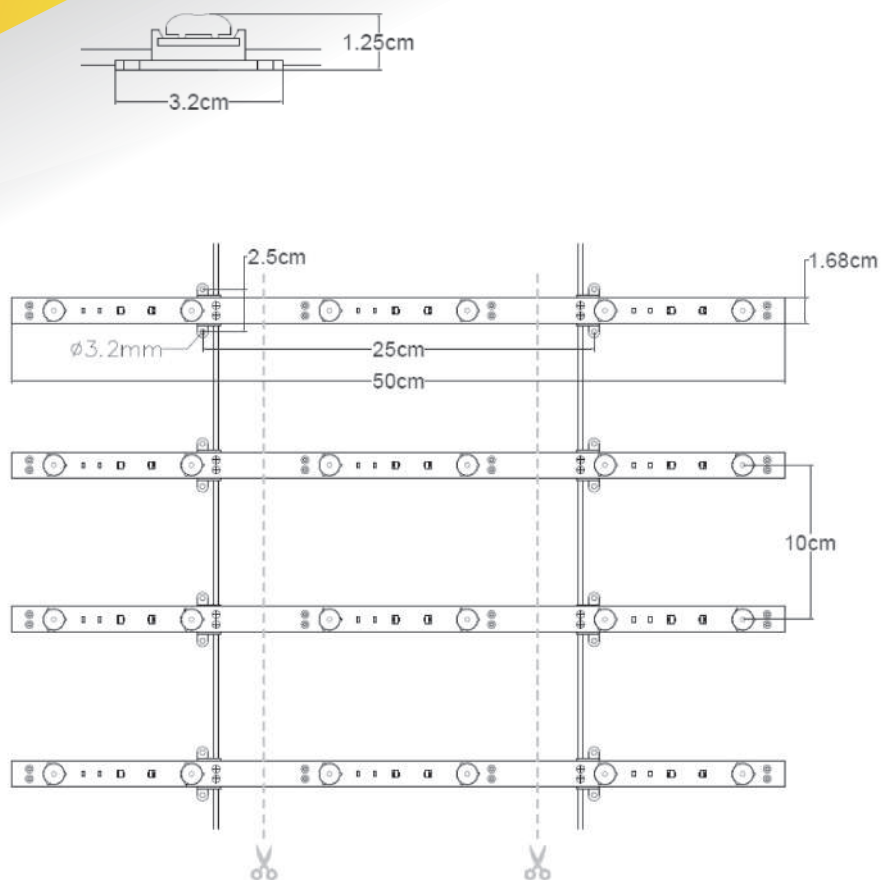

產品規格:

型號	瓦數 ¹ (W)	光通量 ² (lm)	CCT(K)	長度(cm)
Shooting Star-G3	2	260	白光 5700K – 6000K	48 6LED
	3	390		58 8LED
Shooting Star-G3	2	260	燈泡色 3000K	48 6LED
	3	390		58 8LED

Spec.	
工作電壓	DC 24V
LED Chip 供應商	台灣 – 晶元光電 EPISTAR
尺寸	L 475/575 mm * W16.8mm * H7.5mm
LED 間距	100mm (可客製化)
CRI	>85
Efficiency	>130lm / Watt
Angle	>165deg
使用燈箱厚度	! 40mm
使用壽命	30,000小時
使用溫度	-20" to +40"

Remarks:

1. 瓦數、燈條間距客製化
2. Full Range CCT 全白光色溫可訂製
3. 瓦數範圍 $\pm 7\%$
4. 光通量範圍 $\pm 7.5\%$